

# ADAMATIC

VDR DIVIDER/ROUNDER



# VDR DIVIDER/ROUNDER

Extremely accurate scaling and rounding.

Production speeds up to 18,000 pieces per hour.

No divider oil required.

## STANDARD FEATURES:

- Speeds up to 50 strokes per minute.
- Adjustable finger belt discharge conveyor.
- Extended conveyor bed for greater versatility.
- Fully adjustable hydraulic main piston, assuring accurate scaling with minimal dough punishment.
- Variable frequency speed control.
- Stainless steel covers... electrically interlocked for safety.
- Digital total stroke indicator and strokes per minute indicator.
- Central drive unit with electric clutch.
- Flattening roller, adjustable height, mounted on discharge belt.
- 5 H.P. drive.
- 1.5 H.P. rounding motor.
- Simple weight adjustment.
- BISSC approved. Easy to clean and maintain.
- UL listed control panel.
- VDR tool group.

## DIVIDING RANGES:

- 2 pocket: (bread) 10 to 19 oz (280 to 532 gr).
- 4 pocket: (bread & rolls) 1.5 to 10 oz (42 to 280 gr).
- 6 pocket: (rolls) 1.25 to 4.5 oz (35 to 126 gr).

## OPTIONAL EQUIPMENT:


- Dough chunker (250 lb). NOTE: Required if other acceptable feeding system is not used.
- Variable frequency rounding control.

## SPECIFICATIONS:

- Electrical - 220/60/3 (other voltages available).
- Total amps - 50 at 220 volts.
- Shipping weight - 4,200 lb.

Scaling and production weights may vary with different dough consistencies.

Manufacturer reserves the right to make changes in sizes and specifications.

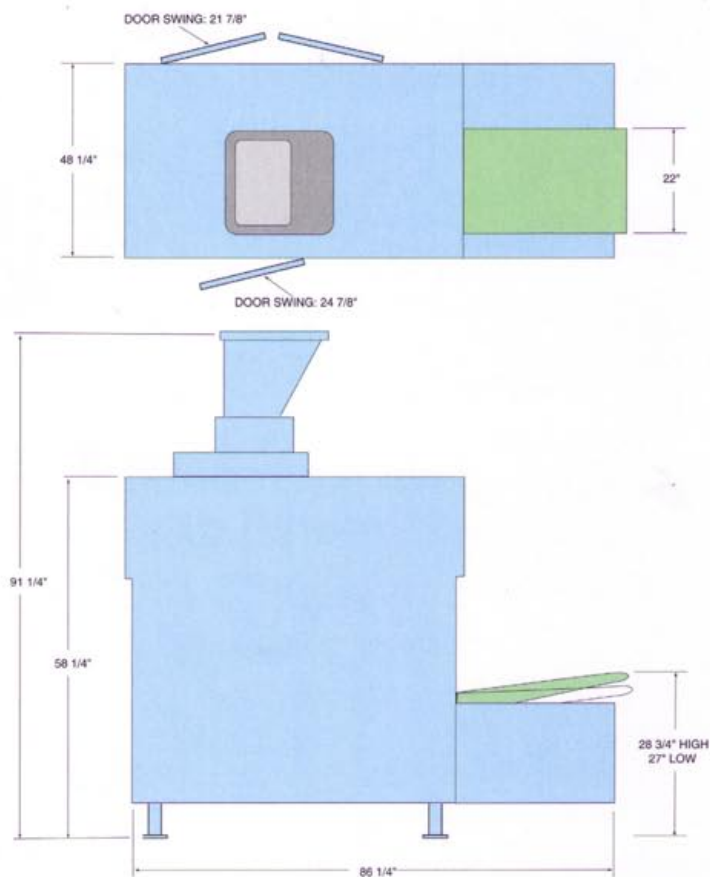

©2008 Belshaw Adamatic Bakery Group

**Belshaw Adamatic Bakery Group**  
814 44th Street NW, Suite 103  
Auburn, WA 98001  
Phone: 800-578-2547 Fax: 206-322-5425  
www.adamatic.com

Automatic Roll Makeup Systems • Intermediate Proofers • Turret Head Roll Stampers • Sheeters • Molding Conveyor Tables • Straightening  
-Out Devices • Wetting & Seeding Units • Panners • Roll Divider / Rounders • ABS Roll-In Proofers • Double Rack Ovens